

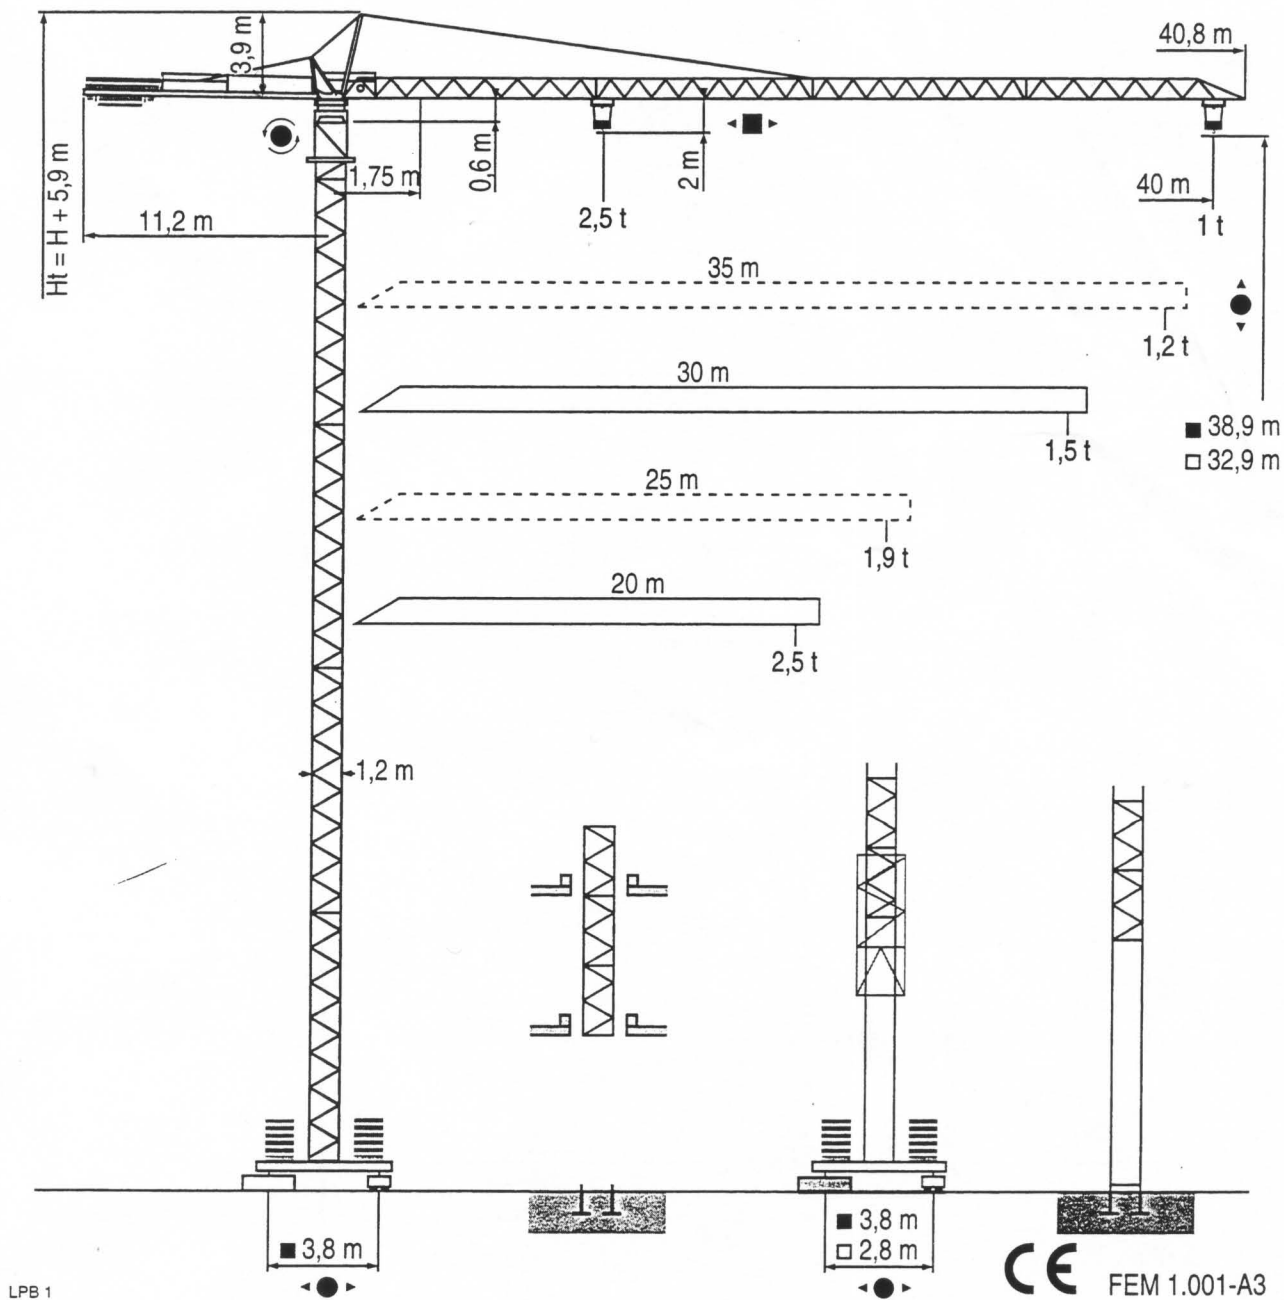
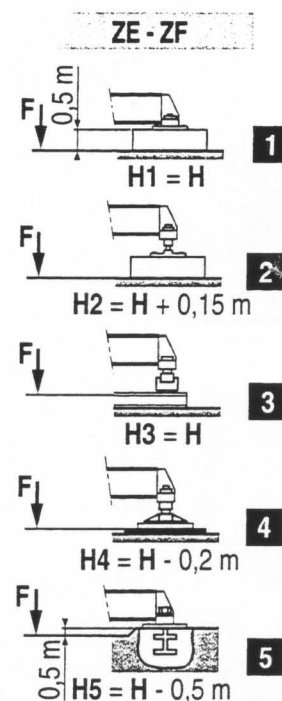


SP 50 A

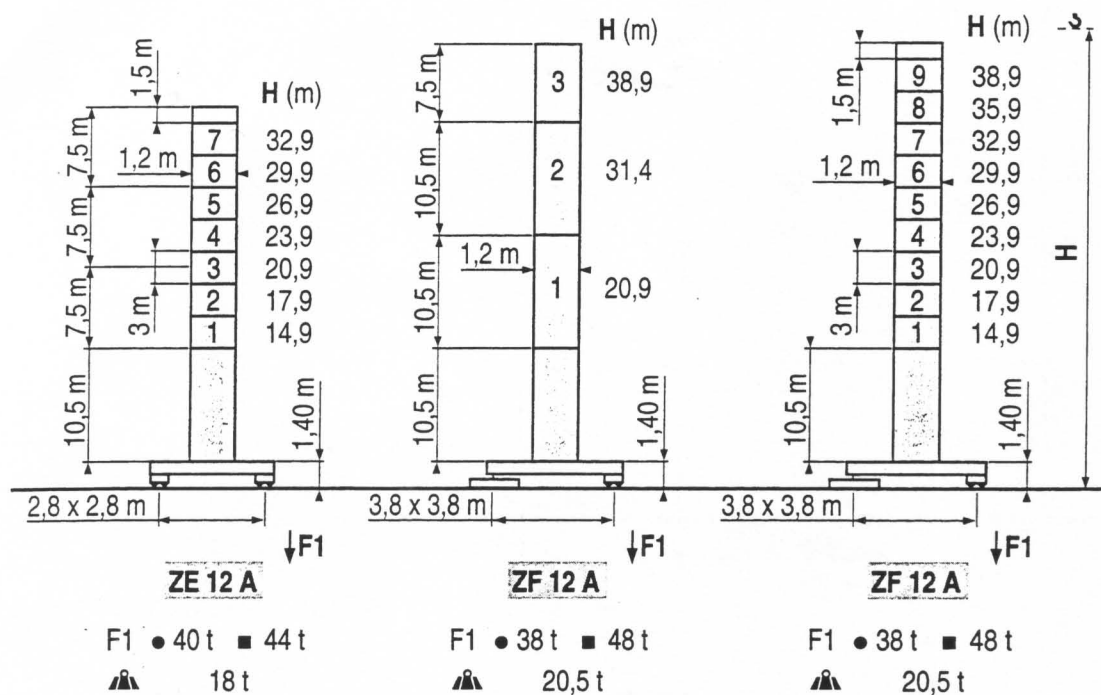

POTAIN 

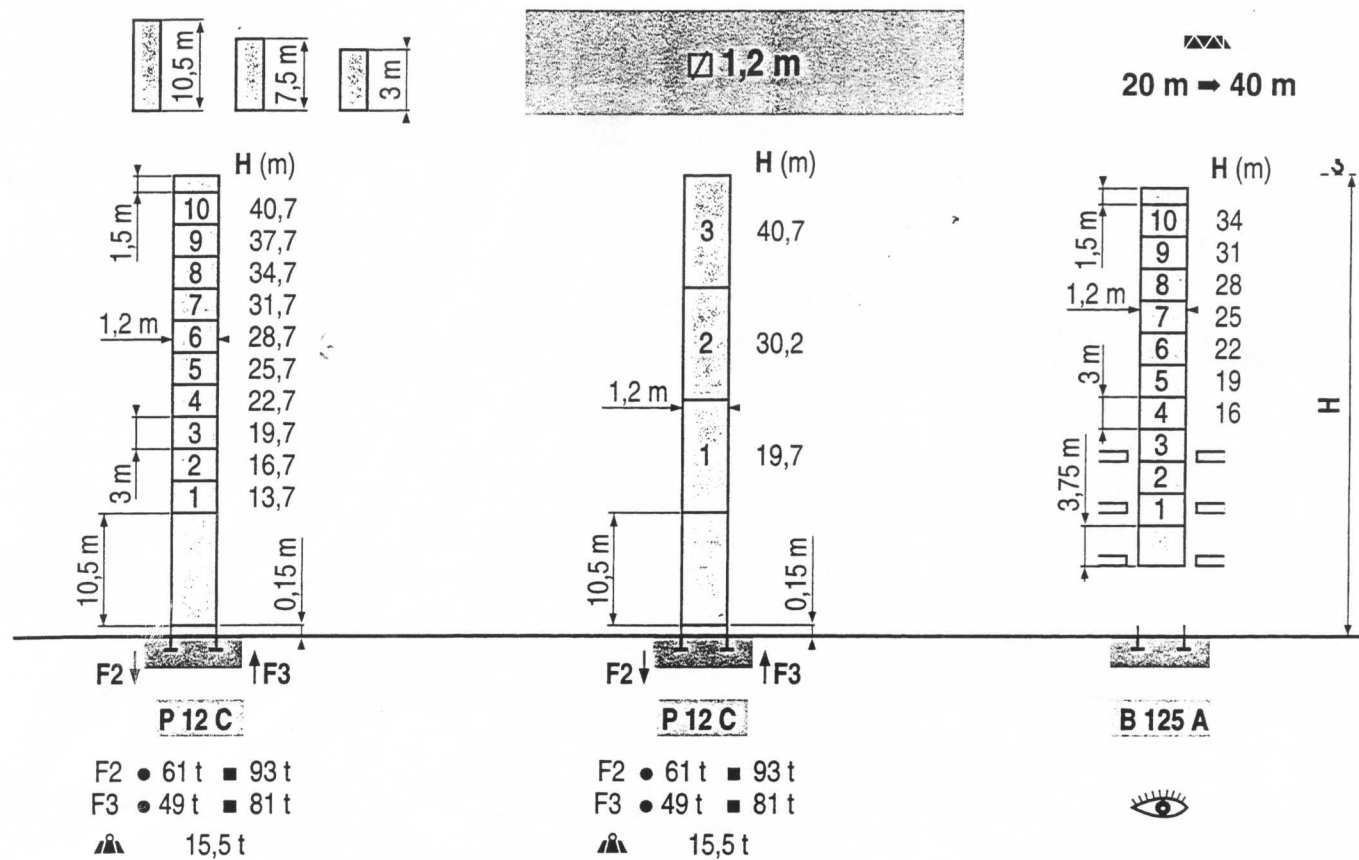

Consultare gru in cavedio



Reazioni in servizio



Reazioni fuori servizio



A vuoto senza zavorra e con braccio massimo e altezza massima.


Curve di carico

40 m	1,75 ▶	18,64	20	22	25	27	30	32	35	37	40 m
		2,5	2,31	2,07	1,78	1,63	1,43	1,32	1,19	1,1	t
35 m	1,75 ▶	18,84	20	22	25	27	30	32	35 m		
		2,5	2,34	2,09	1,8	1,65	1,45	1,34	1,2	t	
30 m	1,75 ▶	19,38	20	22	25	27	30 m				
		2,5	2,41	2,16	1,86	1,7	1,5	t			
25 m	1,75 ▶	19,72	20	22	25 m						
		2,5	2,46	2,2	1,9	t					
20 m	1,75 ▶		20 m								
			2,5	t							


LPB 1

Gru in cavedio

B 125 A

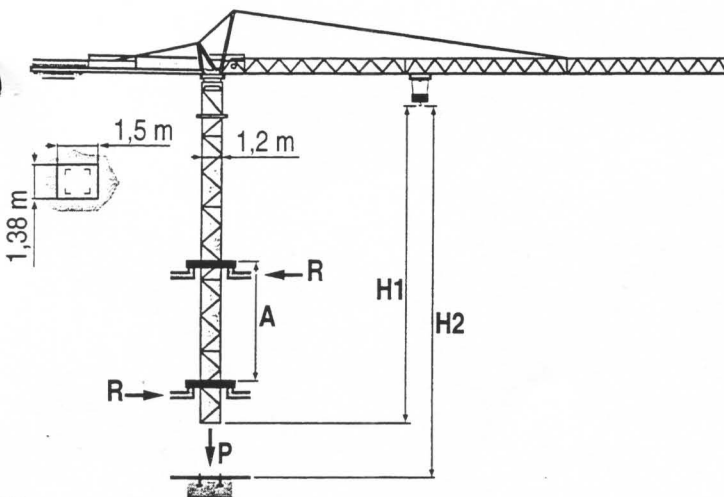

LPB 1

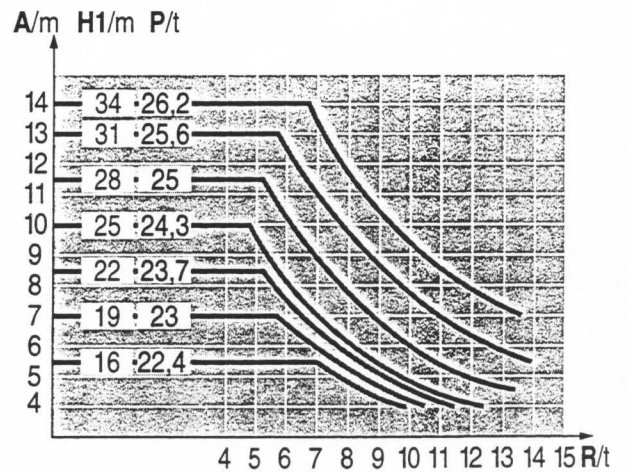

- A Distanza fra i telai
- H1 Altezza gru
- P Peso della gru (in servizio)
- R Reazione orizzontale

						ch - PS hp	kW	
	15 PC 13	m/min t	7 2,5	21 2,5	42 1,3	15	11	90 m > 90 
	25 PC 13	m/min t	7 2,5	36 2,5	72 1,3	25	18,4	193 m > 193 
	3 D2 V5	m/min	21 - 42			3	2,2	
	RCV 40	tr/min U/min rpm	0 → 0,8			6	4,5	
	ZE - ZF  TVD 324 C1	m/min	26			2 x 4	2 x 2,9	
CEI 38		IEC 38	kVA					
400 V (+6% -10%) 50 Hz			15 PC : 25 kVA 25 PC : 35 kVA			84/534 - 87/405		

LPB 1

-  Sollevamento
-  Distribuzione
-  Rotazione
-  Traslazione
-  Conforme alle direttive CEE 84/534
e 87/405 sul livello acustico
-  Consultateci

POTAIN 
 GROUPE LEGRIS INDUSTRIES

18.Rue de Charbonnières, B.P. 173-F
 69132 ECULLY Cedex
 Tél. (33)04.72.20.20.20
 Fax (33)04.72.20.20.00
<http://www.potain.fr>
 E-mail : mkt@potain.fr

SP 50 A

Copyright.Reproduction interdite © POTAIN 1998

Deutschland
 POTAIN GmbH Tel : 06.105.704.0
Italia
 POTAIN S.p.A. Tel : 039.65.631
China
 Zhangjiagang POTAIN Tel : 520. 877.1451

Modifiche riservate

Printed in France

Réalisation SODIP